


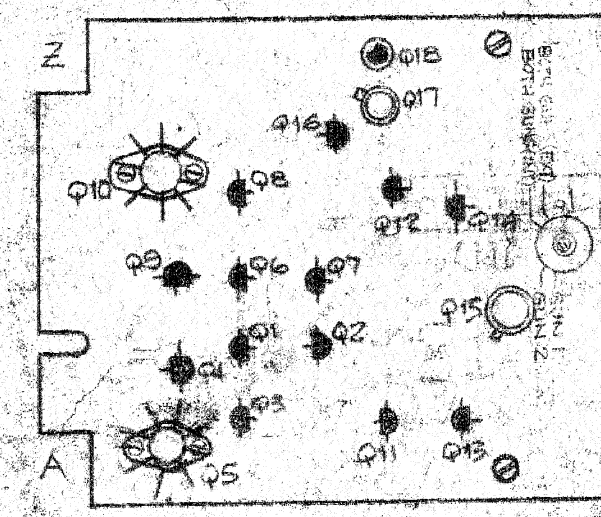

5-ES#C6 ARE CRL#CK503 CAPACITORS
4-PC CARD REFERENCE DRAWINGS:
ARTWORK #306 3173A, FAB#306 3183A,
ASSY#306 3183A, SILKSCREEN MASTER #306 8002
3-DIODES ARE INTL RECT#10DB.
2-VOLTAGES GIVEN ARE WITH RESPECT TO GROUND.
1-RESISTORS 1/2W 5% CARBON

NOTES - UNLESS OTHERWISE SPECIFIED.

TOLERANCES EXCEPT AS NOTED				308-3163-5A	
INTERNAL RADI $\geq$.015 MAX.		BREAK ALL EDGES $\pm$.005-.015		USED ON DWG. NO.	
DRILLED HOLES: $\frac{1}{8}$ DIA. $\pm$.005 OVER $\frac{1}{8}$ DIA. $\pm$.010 DECIMAL $\pm$ _____ FRACTIONAL $\pm$ _____		ANGULAR _____ °		THREAD CLASS _____	
FINISH 					
BERKELEY  CALIFORNIA A DIVISION OF AIR REDUCTION COMPANY, INCORPORATED					
DRAWN BY JIM CHERCAK		DATE 4 / 3 / 69		CHECK BY <i>W. O'Connell</i>	
APP'VD BY <i>W. O'Connell</i>		SCALE 1" = 1"		DRAWING NUMBER	
A-T-STANDARD		ES-5A		SERIAL	
CURRENT REGULATED FOCUS CONTROL				308-3163 E	
P.C. CARD SCHEMATIC					